



**MAXIMISE EFFICIENCY,
 MINIMISE EFFORT,
 ACHIEVE
 PRODUCTIVITY.**

Labelling Solutions Made Convenient.

Redefine productivity with Epson's ColorWorks C6000 series colour label printers. Integrated with auto-cutter¹ or auto-peeler² capabilities, the hassles of manual cutting and removing of label backing papers are eliminated. The auto-cutting¹ function not only enables individualised print job cuts but also offers the flexibility of customising the set amount of pieces required. The auto-peeler² feature is ideal for on-demand print-and-apply colour label printing installations. Beyond efficient functionalities, these ColorWorks printers deliver quality prints with crisp images that are sure to impress any audience.



- Auto-cutter¹
- Auto-peeler²
- High capacity inks
- Print speed



IT'S IN THE DETAILS.

With PrecisionCore printhead technology, Epson ColorWorks C6050A/P and C6550A/P excels with speed and quality.

Optimise Productivity

Auto-cutter¹ and peeler² deliver fast colour label printing to improve efficiency in the production line.

Seamless Connectivity

High technology compatibility allows for seamless integration into existing host systems across multiple platforms.

Astounding Print Quality

Variable droplet size of up to 1200 dpi resolution ensures incredibly crisp images.

¹ Applicable for C6050A and C6550A only.
² Applicable for C6050P and C6550P only.

When it comes to on-demand colour label printing solutions, enjoy greater productivity without compromising on print quality. The ColorWorks label printers possess functionalities that offer unyielding efficiency and convenience to printing performance that delivers extraordinary output.



Enhanced Production Capability

Epson's C6050A and C6550A ColorWorks printers come with a built-in auto-cutter that supports individual piece-by-piece cuts, or programmed set pieces of cuts by batch. This includes cutting that is based on the pre-fixed number of prints or cutting at the end of a print batch.

The C6050P and C6550P's peel-and-present model improves efficiency and convenience by eliminating the need for manual peeling. When integrated with a print-and-apply system through the use of label applicators, a more seamless workflow experience is enabled, enhancing productivity in the production line.

Crisp Images

A higher dpi translates to a clearer, more detailed output. With a print resolution of up to 1200 dpi, variable droplet size and Spot Colour Matching* that assures greater colour accuracy, the C6050A/P and C6550A/P ColorWorks label printers series produce incredible print images.



Industrial label



Food and beverage label



Medication label

* Spot colour matching is subjected to the printer's ink spectrum capability.

High Connectivity

Compatible with a wide range of technologies including multi-platform operating systems such as Windows, Mac and Linux along with application software including SAP and legacy systems using ZPL II commands, the set-up process becomes effortless and can be integrated into nearly any workflow seamlessly.



World's First Peeler-equipped Inkjet Label Printer*

Making it possible to apply labels immediately after printing, the C6050P and C6550P can be used in any desktop printing operations. When integrated with a label applicator in the production floor, it offers a unique print-and-apply system that can be used both online and offline.



Easy Use and Maintenance

Intuitive designs including easy-load spindle, flexible paper cover and frontal ink cartridge loading allows for quick changes between label sizes, easy access when loading paper and effortless replacement of ink cartridges. Equipped with a 2.7" colour LCD, printer status can be checked and configured when required. Enjoy seamless installation in a variety of environments with the ColorWorks' space-saving design.



Durable, Exceptional Quality Inks

The ColorWorks C6000 series incorporates UltraChrome DL pigment inks that comply with BS 5609 certification for GHS compliant labelling. These inks possess high pigment density, resin coating for more stability, and an even surface and gloss, making it perfect for professional display and sales.



Epson pigment ink

Epson pigment ink is not water soluble and firmly binds to media fibers, resisting water and other moisture.



Dye-based ink

Conventional dye-based ink is water soluble so printouts can be negatively affected by water and other moisture.



PrecisionCore TFP Printhead

With its stunning ability to scale while delivering unbeatable speed and precision, the printhead's perfectly round nozzles dispense precise ink droplets, which guarantee consistent superior image quality.

* Based on a survey conducted by Epson as of September 22, 2019.

SPECIFICATIONS
C6050A/C6050P/C6550A/C6550P


MODEL NUMBER	C6050A	C6050P	C6550A	C6550P
Print Technology	Serial Inkjet PrecisionCore TFP® with Nozzle Verification Technology			
Technology	Four-colour printing, individual ink cartridge (UltraChrome™ DL pigment ink: C, M, Y, K)			
Colour				
Ink Cartridge	Black, cyan, magenta, yellow			
Colour	SJIC40P-BK/SJIC40P-C/SJIC40P-M/SJIC40P-Y			
Model				
Print Resolution	1200dpi x 1200dpi (Max.)			
Print Width	Max. 108mm		Max. 211.9mm	
Print Speed	Max speed (300x600dpi): 119mm/s, Speed (600x600dpi): 75mm/s, Normal (600x600dpi): 48mm/s, Quality (600x1200dpi): 18mm/s *When printing 101.6mm width			
Print speed ¹ (for Matte paper label, Synthetic label)	Max speed (300x600dpi): 119mm/s, Speed (600x600dpi): 75mm/s, Normal (600x600dpi): 48mm/s, Quality (600x1200dpi): 18mm/s, Max quality (1200x1200dpi): 8mm/s *When printing 101.6mm width		Max speed (300x600dpi): 85mm/s, Speed (600x600dpi): 49mm/s, Normal (600x600dpi): 34mm/s, Quality (600x1200dpi): 13mm/s *When printing 203.2mm width	
Print speed ² (for Glossy paper label, Glossy film label, High glossy paper label)	Normal (600x600dpi): 48mm/s, Quality (600x1200dpi): 18mm/s, Max quality (1200x1200dpi): 8mm/s *When printing 101.6mm width		Normal (600x600dpi): 34mm/s, Quality (600x1200dpi): 13mm/s, Max quality (1200x1200dpi): 6mm/s *When printing 203.2mm width	
Interface	USB2.0, Ethernet 1000Base-T / 100Base-TX / 10Base-T			
Extended interface	Dsub-25 pin			
Option	Paper Holder C6000 (for C6050 Series)		Paper Holder C6500 (for C6550 Series)	
Print Font	Built-in font available			
Barcode Font (Printer Driver Built-In)	UPC-A, UPC-E, JAN13(EAN), JAN8(EAN), Code39, ITF, Codabar, Code93, Code128, GS1-128, GS1 DataBar Omnidirectional, GS1 DataBar Truncated, GS1 DataBar Limited, GS1 DataBar Expanded			
Barcodes	PDF417, QR Code, Maxi Code, GS1 DataBar Stacked, GS1 DataBar Stacked Omnidirectional, GS1 DataBar Expanded Stacked, DataMatrix, Aztec Code, MicroPDF417, Micro QR Code			
2-Dimensional Symbols	Roll media, Fanfold media			
Media Source	Matte paper label, Synthetic label, Glossy paper label, Glossy film label, High glossy paper label			
Media Type	Continuous label (BM or w/o BM), Die-cut label (Gap or BM)			
Media Form	Roll media			
Roll media	Die-cut label (BM)			
Fanfold media				
Media Specifications	25.4mm - 112mm			
Backing paper width	25.4mm - 112mm		25.4mm - 215.9mm	
Label width	21.4mm - 108mm		21.4mm - 211.9mm	
Media thickness	Matte paper label: 0.178mm, Synthetic label: 0.235mm, Glossy paper label: 0.174mm, Glossy film label: 0.164mm, High glossy paper label: 0.188mm			
Black mark size	Width: 18.4mm or over, Length: 4mm-25.4mm			
Die-cut label gap	2mm - 6mm (If the gap is 3 mm or less, need to adjust the detector)			
Roll diameter	Max. 203.2mm		Max. 152.4mm	
Roll paper core inner diameter	76.2 mm ±0.5 mm			
Number of folds	750 or less			
Winding direction	Face Out			
Autocutter Life	Matte paper, Glossy paper, N.A.			
Die-cut label	Glossy film, High glossy paper: 1,500,000 cuts Synthetic: 500,000 cuts		Matte paper, Glossy paper, N.A. Glossy film, High glossy paper: 1,500,000 cuts Synthetic: 500,000 cuts	
Continuous label	Glossy paper: 300,000 cuts Matte paper, High glossy paper: 200,000 cuts Synthetic, Glossy film: 100,000 cuts		Glossy paper: 300,000 cuts Matte paper, High glossy paper: 200,000 cuts Synthetic, Glossy film: 100,000 cuts	
Temperature/ Humidity	5-35 degrees Celsius, 20-80% RH			
Printing	15-35 degrees Celsius, 20-80% RH			
Barcode printing	When packed (ink not charged): -20 to 60°C, 5 to 85% RH without condensation			
Storage	340 width x 565 depth (Not including protrusion) x 326 height [mm]			
Overall Dimensions	340 width x 565 depth (Not including protrusion) x 326 height [mm]		444 width x 515 depth (Not including protrusion) x 326 height [mm]	
Weight	Approx. 22.5 kg	Approx. 22.8 kg	Approx. 25.5 kg	Approx. 26.3 kg
Power Supply	Built-in power supply			
Power Consumption	100V: Average Approximately 39.4W			
Operating	230V: Average Approximately 38.6W		100V: Average Approximately 39.5W	
Stand-by	230V: Average Approximately 38.7W			
Power off state	100V: Average Approximately 7.51W, 230V: Average Approximately 5.82W			
Rated Voltage	100V: Average Approximately 0.08W, 230V: Average Approximately 0.24W			
Rated Frequency	100-240VAC			
EMC Standards	50-60Hz			
Operating systems	Europe: CE Marking, North America: FCC Class A, CAN ICES-3 (A)/NMB-3 (A), Oceania: Radiocommunications (Electromagnetic Compatibility) Standard, Class A			
	Windows 10, 8.1, 8, 7 SP1, Vista SP2, XP SP3 or later, Server 2019, 2016, 2012 R2, 2012, 2008 R2, 2008, 2003 R2 (32-bit), Mac OS X 10.6.8, Mac OS X 10.7.x, Mac OS X 10.8.x, Mac OS X 10.9.x, Mac OS X 10.10.x, Mac OS X 10.11.x, Mac OS X 10.12.x, Mac OS X 10.13.x, Mac OS X 10.14.x			

Dimensions & Weight

Weight: C6050A: 22.5 kg
C6050P: 22.8 kg



Weight: C6550A: 25.5 kg
C6550P: 26.3 kg

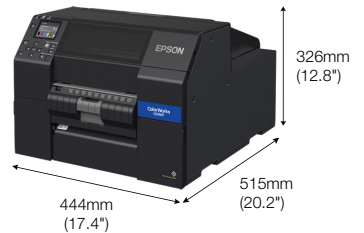

Main Unit

- C31CH76106**
CW-C6050A:COLOR INKJET PRINTER (CUTTER)
- C31CH76206**
CW-C6050P:COLOR INKJET PRINTER (PEELER)
- C31CH77106**
CW-C6550A:COLOR INKJET PRINTER (CUTTER)
- C31CH77206**
CW-C6550P:COLOR INKJET PRINTER (PEELER)

Option

- C32C881301**
Paper Holder C6000 (for C6050 Series)
- C32C881101**
Paper Holder C6500 (for C6550 Series)

Consumable

- C13T44G100**
SJIC40P-K:INK CART. FOR CW-C6050/C6550
- C13T44G200**
SJIC40P-C:INK CART. FOR CW-C6050/C6550
- C13T44G300**
SJIC40P-M:INK CART. FOR CW-C6050/C6550
- C13T44G400**
SJIC40P-Y:INK CART. FOR CW-C6050/C6550
- C13T44G501**
SJMB6000:MAINT. BOX FOR CW-C6050/C6550

©2020 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON and EXCEED YOUR VISION are registered trademarks of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Print samples shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Dealer's Stamp

Information correct at time of printing
Printed March 2020

¹ Matte paper label, Synthetic label
² Glossy paper label, Glossy film label, High glossy paper label

Amit Maheshwari
9312922289

Email : amit@printer-world.com,
Address: office no O/4-20, 4th Floor,
Gaur City Center
Greater Noida West 201306

- > Computer Printers
- > Bar Code Printer,
- > Bar Code Scanner,
- > Label Printer,
- > Computer Scanner,
- > Laptop-Desktop-AIO
- > Software's,
- > Printer & Computer on Rent,
- > Toner-ink Cartridges,
- > CCTV,
- > Networking Products,
- > Accounting & Billing Software
- > Networking Cables, Connector, Switches, Media Converter & Routers.